


RS2I/RV2I



SENSORI MAGNETICI MAGNETIC SENSORS MAGNETSCHALTER

Sensore Reed/Reed Sensor/Reed Sensoren

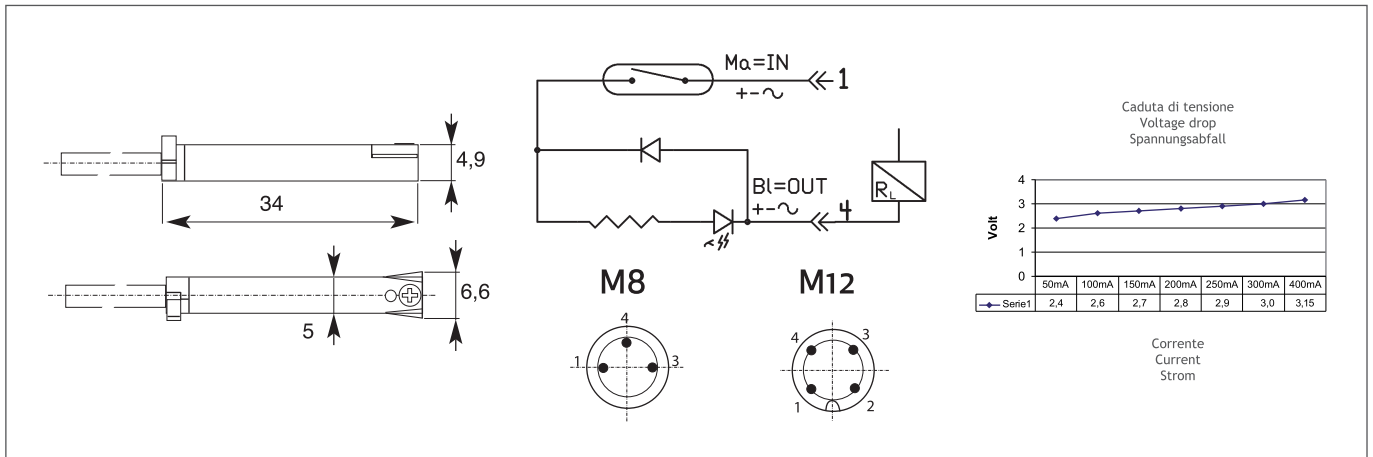

Sensore Housing Gehäuse	PA
Fissaggio Clamping system Befestigung	A scatto Snap Stecken
Tensione di lavoro Operating voltage Betriebsspannung	10 - 110V AC/DC 10 - 240V AC/DC
Temperatura di funzionamento Working temperature Betriebstemperatur	- 25°C / + 90°C
Corrente (max.) Switching current (max.) Schaltstrom	400 mA a 25°C

Logica Sensor Type Bauart	PNP
Portata (max.) Load (max.) Schaltstrom	10 W DC - 8 VA AC
Indicatore luminoso Operating indicator Betriebsanzeige	LED Giallo LED Yellow LED Gelb
Grado di protezione Protection class Schutzart	IP 67 EN 60529 (DIN 40050)

Codici ordine - Codification - Bestellschlüssel

