


Technical Specifications	
Circuits	54 Circuits 1x1000Mbps; 2xSD-SDI; 33x2A; 6x10A
Rating Voltage	0-240Vac/Vdc
Dielectric Strength	≥500Vac@50Hz,60s
Insulation Resistance	≥500MΩ@500Vdc
Working Temperature	-40°C ~ +80°C
Working Humidity	≤60%RH
Working Speed	0-250 rpm
Contact Material	Gold to Gold
Housing Material	Aluminum Alloy (black oxidation)
IP Grade	IP51
Dynamic Resistance	≤35mΩ

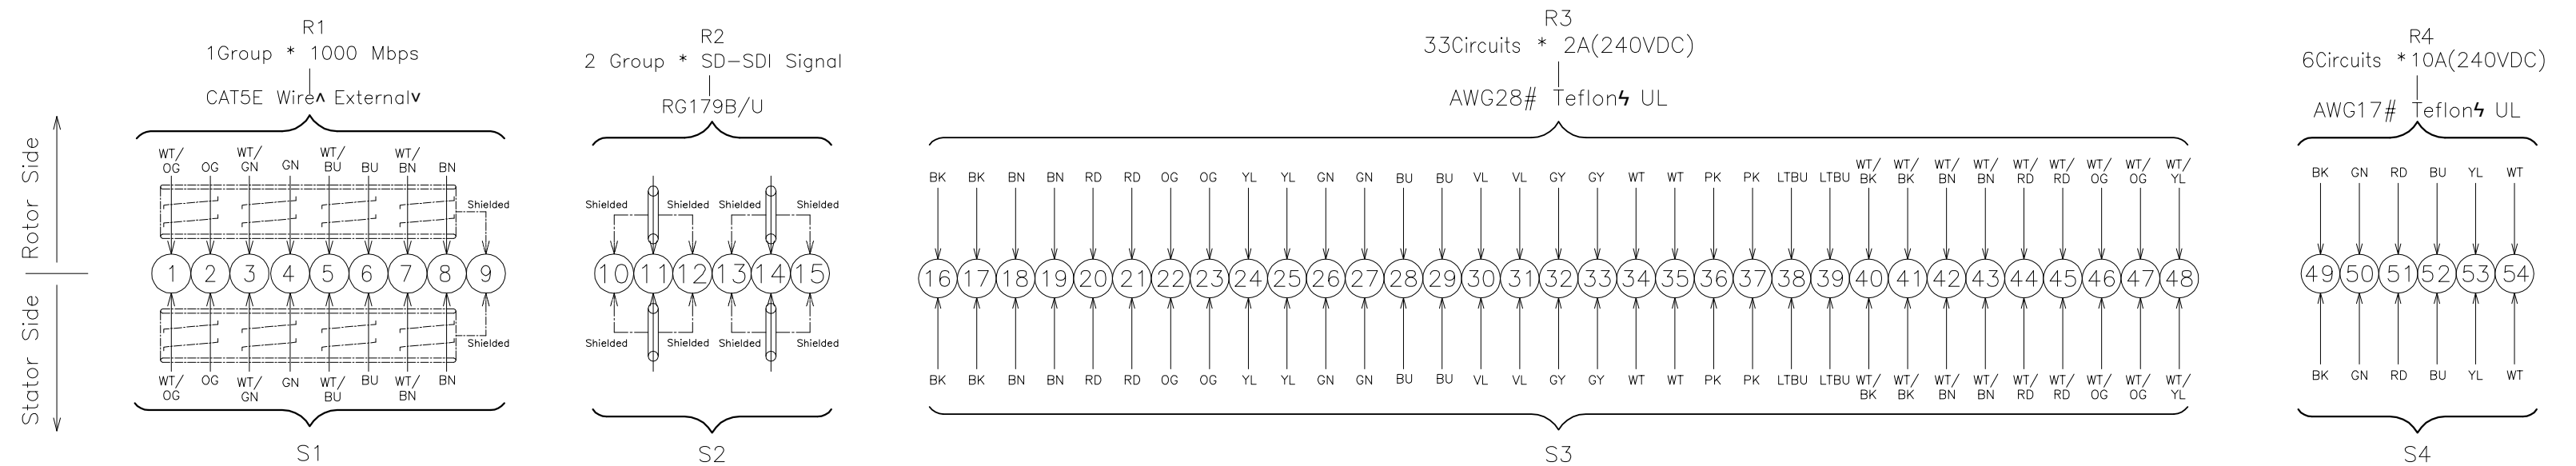

“WE RESERVE ALL RIGHTS IN CONNECTION WITH THIS DOCUMENT AND IN THE SUBJECT MATTER REPRESENTED THEREIN. THE RECIPIENT HEREBY ACKNOWLEDGES THESE RIGHTS AND SHALL NOT, WITHOUT OUR PRIOR PERMISSION IN WRITING, DISCLOSE OR DIVULGE THIS DOCUMENT IN WHOLE OR IN PART TO THE THIRD PARTIES OR USE IT FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS DELIVERED TO RECIPIENT.”

ANGULAR TOLERANCE: ±0.5°
TOLERANCE:
>0.5 - 6 ± 0.1
>6 - 30 ± 0.2
>30 - 120 ± 0.3
>120 - 400 ± 0.5
>400 - 1000 ± 0.8
>1000 - 2000 ± 1.2
>2000 - 4000 ± 2.0

CUSTOMER:
APPLICATION:
PROJECTION:



Slip Ring Outline Drawing

ZEN-X4E RSZ-H47V-301B-JS01

ARTICLE NO:

Designer: KHK
Date: 06.03.2024

Drawing No: 10064

Rev:1