



Technical Specifications (Slip Ring)				
Circuits	12 Circuits: 12x10A			
Rating Voltage	0~380Vac/Vdc			
Working Temperature	-20°C ~ +60°C			
IP Grade	IP54			
Working Speed	0~250 rpm			
Contact Material	Precious Metal			
Housing Material	Aluminum Alloy			
Lead Wire Length	Rotor: 1000mm / Stator: 1000mm			

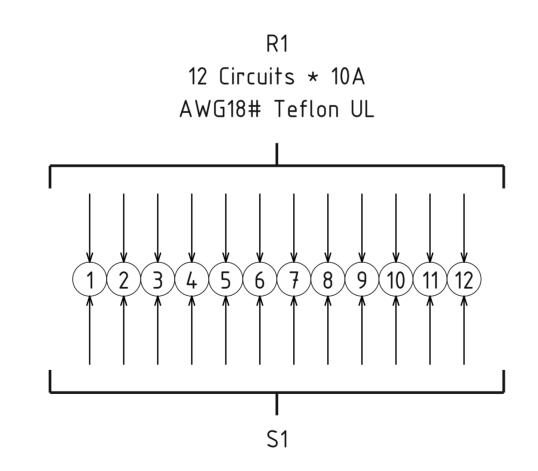

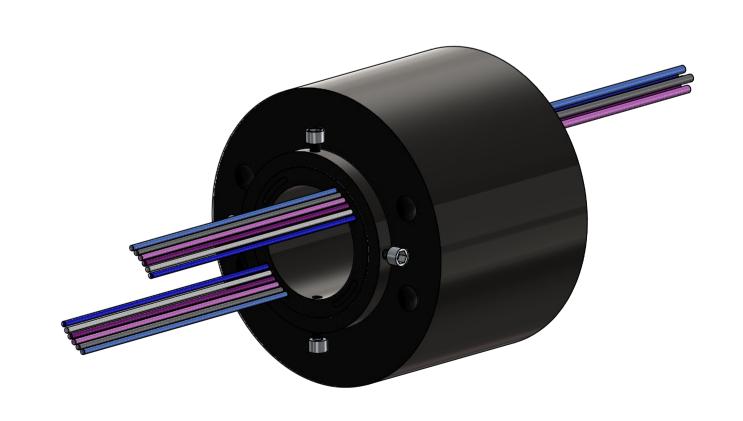

"WE RESERVE ALL RIGHTS IN CONNECTION WITH THIS DOCUMENT AND IN THE SUBJECT MATTER REPRESENTED THEREIN. THE RECIPENT HEREBY ACKNOWLEDGES THESE RIGHTS AND SHALL NOT, WITHOUT OUR PRIOR PERMISSION IN WRITING, DISCLOSE OR DIVULGE THIS DOCUMENT IN WHOLE OR IN PART TO THE THIRD PARTIES OR USE IT FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS DELIVERED TO RECIPIENT."

	TOLERANCE:				Slip Ring Outline Drawing		
>0.5 - 6 ± 0.1		APPLICATION:	— ((R	•			
	>6 - 30 ± 0.2	APPLICATION:		-	ZEN-X5 RSZQ-40-A1-DS01		
	>30 - 120 ± 0.3	1		·			
	>120 - 400 ± 0.5	PROJECTION:	ARTICLE N	ARTICLE NO:			
	>400 - 1000 ± 0.8						
	>1000 - 2000 ± 1.2		Designer: KHK	Date: 10.06.2024	Drawing No: 10128	Rev:1	
	>2000 - 4000 ± 2.0	1 Y	I NIIN	10.00.2024	10120		

ANGULAR TOLERANCE: ±0.5° CUSTOMER: